



# CP-255ID

Multi-Format to DVI Scaler



Operation Manual



## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2011 by Cypress Technology.

All Rights Reserved.

Version 1.1 August 2011

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.





## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
VR0	31/01/13	Preliminary Release
VS1	24/06/13	Updated Format and Diagrams



# CONTENTS

<b>1. Introduction</b> .....	1
<b>2. Applications</b> .....	1
<b>3. Package Contents</b> .....	1
<b>4. System Requirements</b> .....	1
<b>5. Features</b> .....	1
<b>6. Operation Controls and Functions</b> .....	2
6.1 Front Panel.....	2
6.2 Rear Panel .....	3
6.3 Remote Control.....	4
6.4 RS-232 Pin Assignment .....	5
6.5 RS-232 Commands.....	6
6.6 OSD Menu.....	9
6.7 Input Resolution Support .....	13
6.8 Output Resolution Support.....	14
<b>7. Connection Diagram</b> .....	15
<b>8. Specifications</b> .....	16
<b>9. Acronyms</b> .....	17





## 1. INTRODUCTION

This Multi-Format to DVI Scaler is capable of scaling and source-switching from Composite Video, S-Video, PC (VGA) and DVI input signals to a DVI output. A corresponding analog stereo audio input can be switched and sent to the stereo audio output with the video source selection. It has the added benefit of control through front panel buttons, IR remote, or RS-232, and there is on-screen menu (OSD) providing setting selection and system information. The device provides a full range of output resolutions, up to 1080p for HDTV resolutions, and WUXGA (RB) for PC resolutions.

## 2. APPLICATIONS

- Analog to Digital video signal conversion
- Analog and Digital Source Integration
- Upscaling Standard definition video for High-Definition displays

## 3. PACKAGE CONTENTS

- Multi-Format to DVI Scaler
- Remote Control (CR-118)
- 5 V/2.6 A DC Power Adaptor
- Operation Manual

## 4. SYSTEM REQUIREMENTS


Source equipment such as PC/Laptop or DVD Player with HDMI to DVI adaptor, analog sources via standard cabling and DVI display with active speakers and connection cables.

## 5. FEATURES

- Supports the conversion of multiple video and audio formats to DVI
- Supports synchronized output for input video and output audio signals
- Supports 3D de-interlacing, noise reduction and Comb filter
- Supports frame rate conversion
- Supports control via RS-232, IR Remote handset and front panel

## 6. OPERATION CONTROLS AND FUNCTIONS

### 6.1 Front Panel

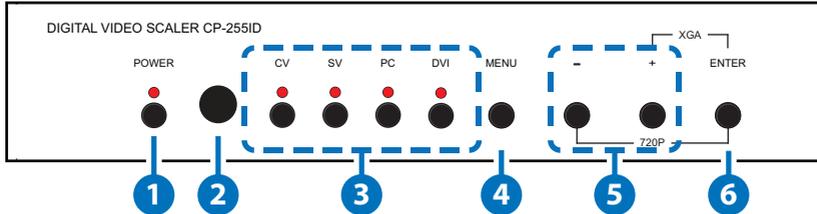

#### 1 POWER and LED

Press this button to switch the device ON or to put the device into STANDBY mode. When the device is connected to an active power supply, the LED will illuminate and the device will switch ON automatically.

#### 2 IR Window

Receives only the IR signal from the supplied remote control.

#### 3 INPUT Buttons and LEDs

Press to directly select the required input. An LED will illuminate to indicate the currently selected source.

#### 4 MENU

Press this button to enter into the on-screen menu (OSD).

#### 5 -/+ (Minus/Plus)


Use these buttons to navigate down and up in the on-screen menu.

#### 6 ENTER

Press this button to confirm the selection.

*Note: Pressing '-' (MINUS) and ENTER simultaneously will immediately switch the output resolution of the device to 720p60. Pressing '+' (PLUS) and ENTER simultaneously will immediately switch the output resolution of the device to XGA.*

## 6.2 Rear Panel

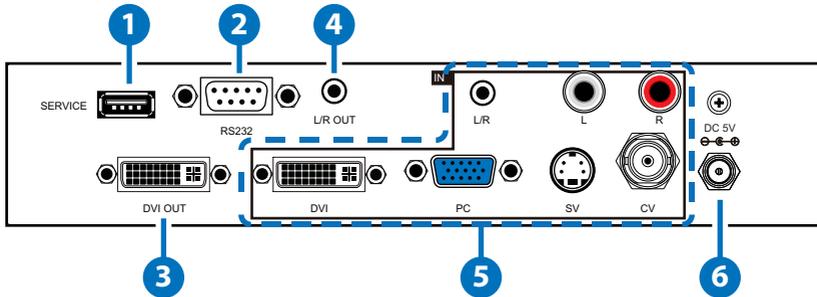

### 1 SERVICE

Reserved for manufacturer use only.

### 2 RS-232

Connect to a PC or RS-232 control system to control the device with RS232 commands (see Sections 6.5).

### 3 DVI OUT

Connect to a DVI display (TV/monitor) for PC signal output or to an HDMI display with an HDMI to DVI adaptor.

### 4 L/R OUT (3.5mm Mini-jack)

Connect to an amplifier or active speaker for audio output in analog stereo with a 3.5mm Mini-jack cable.

### 5 INPUTS

**DVI:** Connect to DVI source such as PC or Laptop or to a HDMI source with a HDMI to DVI adaptor.

**PC:** Connect to a PC or Laptop with a D-sub 15-pin cable.

**CV and L/R:** Connect to a source device such as video/DVD player for both video and audio.

**SV and L/R:** Connect to a source device such as video/DVD player for both S-Video and audio.

**L/R:** Connect to a source device's analog (L/R) output with a 3.5mm Mini-jack cable.

### 6 DC 5V

Connect the 5V DC power supply to the device and plug the adaptor into an AC wall outlet.

## 6.3 Remote Control

### 1 POWER

Press this button to switch the device ON or to put the device into STANDBY mode.

### 2 CV/SV/PC/DVI

Press to directly select the required input.

### 3 EXIT

Press this button to exit the menu or the current selection in the on-screen menu.

### 4 MENU

Press this button to enter the on-screen menu.

### 5 RESET


Press this button to return the device to the factory default settings.

### 6 AUTO ADJUST

Press the button to optimize the positioning of the picture (picture centering) on the screen.

### 7 ▲▼◀▶ and OK

Press OK to confirm the selection or use the directional buttons to navigate the on-screen menus.

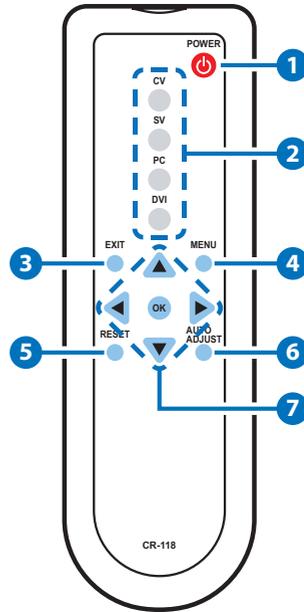

## 6.4 RS-232 Pin Assignment

MULTI-FORMAT TO DVI SCALER			REMOTE CONTROL	
PIN	Assignment		PIN	Assignment
1	NC		1	NC
2	Tx		2	Rx
3	Rx	▶	3	Tx
4	NC	◀	4	NC
5	GND		5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

Baud Rate: 9600bps

Data bit: 8 bits

Parity: None

Flow Control: None

Stop Bit: 1

## 6.5 RS-232 Commands

COMMAND	DESCRIPTION
<b>S SOURCE 1~4</b>	1=DVI 2=VIDEO 3=S-VIDEO 4=PC
<b>R SOURCE</b>	Reports the numerical equivalent for SOURCE setting (as above)
<b>S OUTPUT 0~25</b>	0=Native 1=640×480 2=800×600 3=1024×768 4=1280×768 5=1360×768 6=1280×720 7=1280×800 8=1280×1024 9=1440×900 10=1400×1050 11=1680×1050 12=1600×1200 13=1920×1080 16=1920×1200 17=480p 18=720p@60 19=1080p@60 20=1080i@60 22=576p 23=720p@50 24=1080p@50 25=1080i@50
<b>R OUTPUT</b>	Reports the numerical equivalent for OUTPUT setting (as above)
<b>S SIZE 0~6</b>	0=OVERSCAN 1=FULL 2=BEST FIT 3=PAN SCAN 4=LETTER BOX 5=UNDER 2 6=UNDER 1
<b>R SIZE</b>	Reports the numerical equivalent for SIZE setting (as above)
<b>S PC AUTO 1</b>	Turn on (1) or off (0) the PC AUTO feature.
<b>S CONTRAST 0~60</b>	Setups the numerical equivalent for CONTRAST setting (as left)
<b>R CONTRAST</b>	Reports the numerical equivalent for CONTRAST setting







## 6.6 OSD Menu

MAIN MENU	SUBMENU	3RD MENU	4TH MENU
DISPLAY	OUTPUT	Native	
		640×480 60	
		800×600 60	
		1024×768 60	
		1360×768 60	
		1280×720 60	
		1280×800 60	
		1280×1024 60	
		1440×900 60	
		1400×1050 60	
		1680×1050 60	
		1600×1200 60	
		1920×1080 60	
		1920×1200 60	
		720×480P 60	
		1280×720P 60*	
		1920×1080I 60	
		1920×1080P 60	
		720×576P 50	
		1280×720P 50	
1920×1080I 50			
1920×1080P 50			

MAIN MENU	SUBMENU	3RD MENU	4TH MENU	
<b>DISPLAY</b>	SIZE (For VIDEO input)	OVER SCAN		
		FULL*		
		BEST FIT		
		PAN SCAN		
		LETTER BOX		
	SIZE (For VIDEO input)	UNDER 2		
		UNDER 1		
	MODE INFO	INFO*		
		ON		
		OFF		
	PC (For PC input)	AUTO SETUP		No
				YES
		H_POSITION		0~60 (30)
		V_POSITION		0~60 (30)
		PHASE		
		CLOCK		
		WXGA/XGA		XGA*
				WXGA
		RESET		NO
				YES

MAIN MENU	SUBMENU	3RD MENU	4TH MENU
COLOR	COLOR	R	0~1023 (512)
		G	0~1023 (512)
		B	0~1023 (512)
		R OFFSET	0~1023 (512)
		G OFFSET	0~1023 (512)
		B OFFSET	0~1023 (512)
	CONTRAST	0~60 (30)	
	BRIGHTNESS	0~60 (30)	
	HUE (For VIDEO input)	0~60 (30)	
	SATURATION (For VIDEO input)	0~60 (30)	
	SHARPNESS (For VIDEO input)	0~30 (0)	
	NR. (For VIDEO input)	OFF*	
		LOW	
MIDDLE			
HIGH			
AUDIO	VOLUME	0~100	
	DELAY (For L/R output)	OFF*	
		40ms	
		110ms	
		150ms	
	SOUND	ON*	
		MUTE	

MAIN MENU	SUBMENU	3RD MENU	4TH MENU
<b>SETUP</b>	FACTORY RESET	NO*	
		YES	
	KEY LOCK	OFF*	
		ON	
	POWER SAVE	OFF*	
		ON	
<b>INFORMATION</b>	INPUT		
	OUTPUT		
	REVISION		

Note:

- Items with Asterisk (\*) are the Factory default settings.
- Items in brackets are the default values for those settings


## 6.7 Input Resolution Support

INPUT RESOLUTION	PC	DVI/HDMI	CV/SV
NTSC	-	-	✓
PAL	-	-	✓
640×480@60/72/75 Hz (VGA)	✓	✓	-
800×600@56/60/72/75 Hz (SVGA)	✓	✓	-
1024×768@60/70/75 Hz (XGA)	✓	✓	-
152×864 @75 Hz (XGA+ )	✓	✓	-
1280×720@60 Hz	✓	✓	-
1280×768@60 Hz	✓	✓	-
1280×800@60 Hz	✓	✓	-
1280×960@60 Hz	✓	✓	-
1280×1024@60/75 Hz	✓	✓	-
1360×768@60 Hz	✓	✓	-
1400×1050@60 Hz (SXGA+)	✓	✓	-
1440×900@60 Hz (WXGA+)	✓	✓	-
1600×1200@60 Hz (UXGA)	✓	✓	-
1680×1050@60 Hz (RB) (WUXGA)	✓	✓	-
1920×1080@60 Hz	✓	✓	-
1920×1200@60 Hz (RB)	✓	✓	-
480i/576i	-	✓	-
480p/576p	-	✓	-
720p@50/60 Hz	-	✓	-
1080i@50/60 Hz	-	✓	-
1080p@24/30/50/60 Hz	-	✓	-

## 6.8 Output Resolution Support

OUTPUT RESOLUTION	DVI/HDMI
Native	✓
640×480@60 Hz	✓
800×600@60 Hz	✓
1024×768@60 Hz	✓
1360×768@60 Hz	✓
1280×720@60 Hz	✓
1280×800@60 Hz	✓
1280×1024@60 Hz	✓
1440×900@60 Hz	✓
1400×1050@60 Hz	✓
1680×1050@60 Hz	✓
1600×1200@60 Hz	✓
1920×1080@60 Hz	✓
1920×1200@60 Hz	✓
480p	✓
576p	✓
720p@50/60 Hz	✓
1080i@50/60 Hz	✓
1080p@50/60 Hz	✓

## 7. CONNECTION DIAGRAM

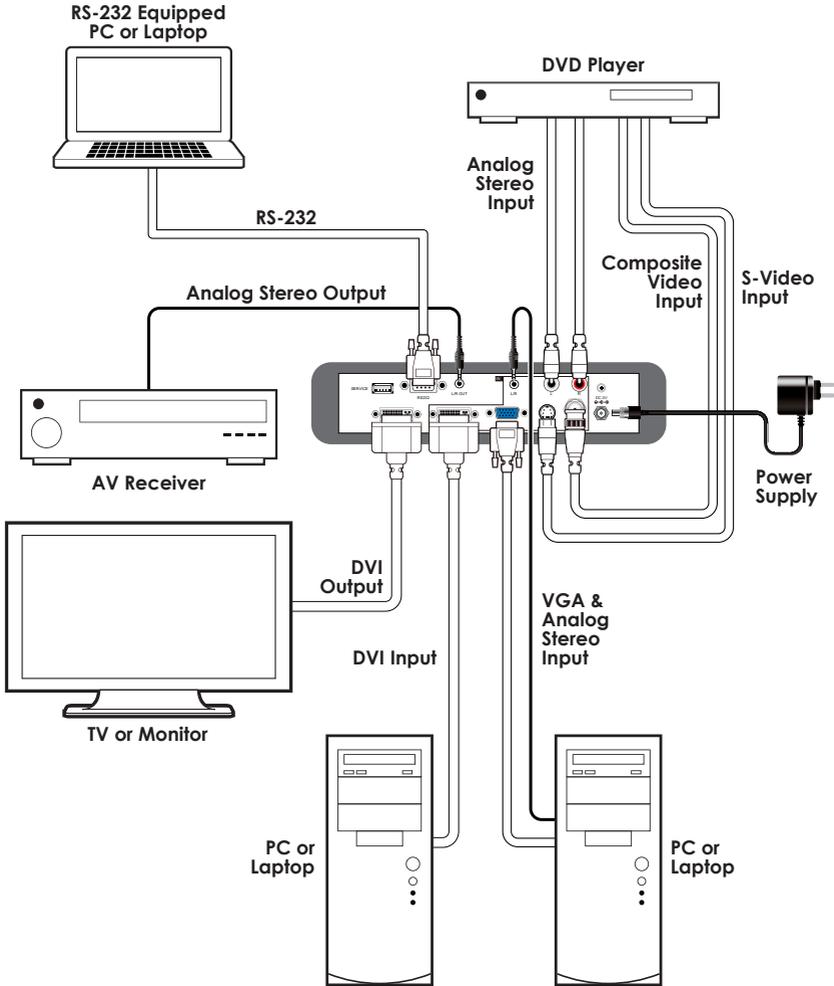

## 8. SPECIFICATIONS

<b>Video Bandwidth</b>	165 MHz
<b>Input Ports</b>	1×DVI, 1×VGA, 1×S-Video, 1×Composite Video, 1×Analog Stereo (L/R), 1×3.5mm Mini-jack, 1×RS-232, 1×USB (Service Only)
<b>Output Ports</b>	1×DVI, 1×3.5mm Mini-jack
<b>Input Resolution Support</b>	Up to 1080p & WUXGA (RB)
<b>Output Resolution Support</b>	Up to 1080p & WUXGA (RB)
<b>Power Supply</b>	5 V/2.6 A DC (US/EU standards, CE/FCC/UL certified)
<b>Dimensions</b>	215 mm (W)×165 mm(D)×47 mm (H)
<b>Weight</b>	970 g
<b>Chassis Material</b>	Metal
<b>Color</b>	Black
<b>Operating Temperature</b>	0 °C ~ 40 °C / 32 °F ~ 104 °F
<b>Storage Temperature</b>	-20 °C ~ 60 °C / -4 °F ~ 140 °F
<b>Relative Humidity</b>	20 ~ 90% RH (non-condensing)
<b>Power Consumption</b>	5.7 W

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>COMP</b>	Component Video
<b>CV</b>	Composite Video
<b>DVI</b>	Digital Visual Interface
<b>HDMI</b>	High-Definition Multimedia Interface
<b>IR</b>	Infrared
<b>NR</b>	Noise Reduction
<b>NTSC</b>	National Television System Committee
<b>OSD</b>	On-screen Display (Menu)
<b>PAL</b>	Phase Alternating Line
<b>RGB</b>	Red Green Blue
<b>SDI</b>	Serial Digital Interface
<b>SV</b>	S-Video
<b>USB</b>	Universal Serial Bus
<b>UXGA</b>	Ultra Extended Graphics Array
<b>VGA</b>	Video Graphics Array
<b>XGA</b>	Extended Graphics Array
<b>WUXGA</b>	Wide Ultra Extended Graphics Array





**CYPRESS TECHNOLOGY CO., LTD**

Home page: <http://www.cypress.com.tw>